


一般機器用フィルムコンデンサ CMEシリーズ

Type CMPS


- 最高許容温度80℃、85℃ UL・CSA 規格認定品  
故障電流10000A
- UL認定品
- CSA認定品
- IEC認定品



回路図



品番構成

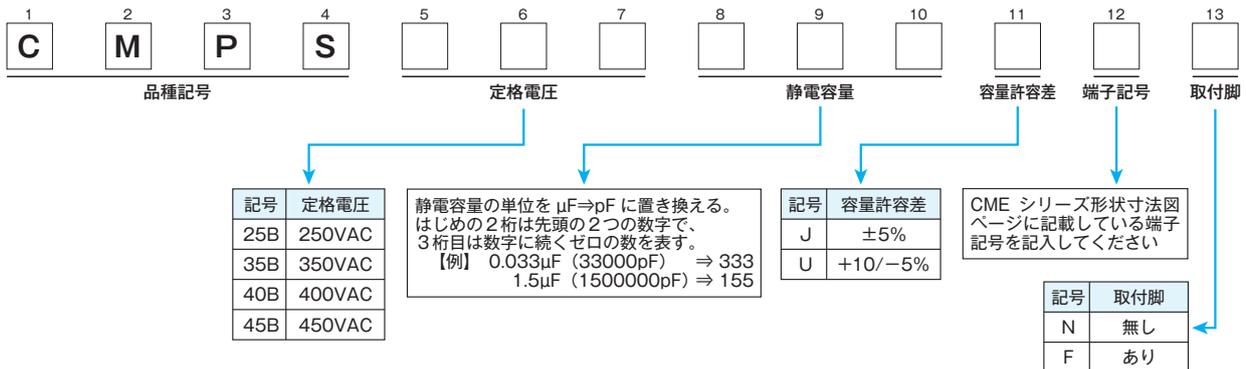

形状寸法図 (mm)

CMEシリーズ 形状寸法図ページをご覧ください。

定格・寸法

● 品番中の記号については右表よりお選びください。

□	端子記号	△	取付脚
CMEシリーズ形状寸法図ページに記載している端子記号を記入してください。		N	無し
		F	あり

■ 定格電圧250VAC/最高許容温度80℃

品番	定格電圧 (VAC)	静電容量 (μF)	寸法 (mm)			
			W	H	T	D
CMPS25B155U□△	250	1.5	31.0	23.5	14.5	24.5
CMPS25B205U□△	250	2.0	31.0	23.5	14.5	24.5
CMPS25B255U□△	250	2.5	31.0	27.0	17.0	27.0
CMPS25B305U□△	250	3.0	31.0	27.0	17.0	27.0
CMPS25B355U□△	250	3.5	31.0	27.0	17.0	27.0
CMPS25B405U□△	250	4.0	37.0	27.0	18.0	28.0
CMPS25B455U□△	250	4.5	37.0	27.0	18.0	28.0
CMPS25B505U□△	250	5.0	38.0	29.0	19.0	29.0
CMPS25B555U□△	250	5.5	38.0	31.0	21.0	31.0
CMPS25B605U□△	250	6.0	38.0	31.0	21.0	31.0
CMPS25B655U□△	250	6.5	48.0	29.0	19.0	29.0
CMPS25B705U□△	250	7.0	48.0	29.0	19.0	29.0
CMPS25B755U□△	250	7.5	48.0	31.0	21.0	31.0
CMPS25B805U□△	250	8.0	48.0	31.0	21.0	31.0
CMPS25B905U□△	250	9.0	48.0	31.5	22.5	32.5
CMPS25B106U□△	250	10.0	58.0	31.0	21.0	31.0
CMPS25B116U□△	250	11.0	58.0	31.0	21.0	31.0
CMPS25B126U□△	250	12.0	58.0	35.0	22.0	32.0
CMPS25B146U□△	250	14.0	58.0	35.0	22.0	32.0
CMPS25B156U□△	250	15.0	58.0	37.0	23.5	38.5
CMPS25B166U□△	250	16.0	58.0	37.0	23.5	38.5
CMPS25B186U□△	250	18.0	58.0	41.0	29.0	44.0
CMPS25B206U□△	250	20.0	58.0	41.0	29.0	44.0
CMPS25B256U□△	250	25.0	58.0	50.0	35.0	50.0
CMPS25B286U□△	250	28.0	58.0	50.0	35.0	50.0
CMPS25B306U□△	250	30.0	58.0	50.0	35.0	50.0
CMPS25B356U□△	250	35.0	58.0	58.0	41.0	56.0
CMPS25B406U□△	250	40.0	58.0	58.0	41.0	56.0
CMPS25B476U□△	250	47.0	58.0	58.0	41.0	56.0

※太枠内は、UL・IECのみの認定品です。

■ 定格電圧350VAC/最高許容温度85℃

品番	定格電圧 (VAC)	静電容量 (μF)	寸法 (mm)			
			W	H	T	D
CMPS35B305U□△	350	3.0	38.0	31.0	21.0	31.0
CMPS35B405U□△	350	4.0	48.0	31.0	21.0	31.0
CMPS35B505U□△	350	5.0	58.0	31.0	21.0	31.0
CMPS35B605U□△	350	6.0	58.0	35.0	22.0	32.0
CMPS35B705U□△	350	7.0	58.0	37.0	23.5	38.5
CMPS35B755U□△	350	7.5	58.0	37.0	23.5	38.5
CMPS35B805U□△	350	8.0	58.0	41.0	29.0	44.0
CMPS35B905U□△	350	9.0	58.0	41.0	29.0	44.0
CMPS35B106U□△	350	10.0	58.0	41.0	29.0	44.0
CMPS35B156U□△	350	15.0	58.0	50.0	35.0	50.0
CMPS35B206U□△	350	20.0	58.0	58.0	41.0	56.0
CMPS35B246U□△	350	24.0	58.0	58.0	41.0	56.0

※太枠内は、UL・IECのみの認定品です。

■ 定格電圧400VAC/最高許容温度85℃

品番	定格電圧 (VAC)	静電容量 (μF)	寸法 (mm)			
			W	H	T	D
CMPS40B105U□△	400	1.0	31.0	27.0	17.0	27.0
CMPS40B125U□△	400	1.2	31.0	27.0	17.0	27.0
CMPS40B155U□△	400	1.5	37.0	27.0	18.0	28.0
CMPS40B205U□△	400	2.0	38.0	29.0	19.0	29.0
CMPS40B255U□△	400	2.5	38.0	31.0	21.0	31.0
CMPS40B305U□△	400	3.0	48.0	31.0	21.0	31.0
CMPS40B355U□△	400	3.5	48.0	31.5	22.5	32.5
CMPS40B405U□△	400	4.0	58.0	31.0	21.0	31.0
CMPS40B455U□△	400	4.5	58.0	35.0	22.0	32.0
CMPS40B505U□△	400	5.0	58.0	35.0	22.0	32.0
CMPS40B605U□△	400	6.0	58.0	37.0	23.5	38.5
CMPS40B705U□△	400	7.0	58.0	41.0	29.0	44.0
CMPS40B755U□△	400	7.5	58.0	41.0	29.0	44.0
CMPS40B805U□△	400	8.0	58.0	41.0	29.0	44.0

※容量許容差±5% (J) 品が必要な場合は、品番1桁目をU→Jへ変更してください。

■ 定格電圧450VAC/最高許容温度85℃

品番	定格電圧 (VAC)	静電容量 (μF)	寸法 (mm)			
			W	H	T	D
CMPS45B604U□△	450	0.6	31.0	23.5	14.5	24.5
CMPS45B804U□△	450	0.8	31.0	27.0	17.0	27.0
CMPS45B904U□△	450	0.9	31.0	27.0	17.0	27.0
CMPS45B105U□△	450	1.0	37.0	27.0	18.0	28.0
CMPS45B125U□△	450	1.2	37.0	27.0	18.0	28.0
CMPS45B155U□△	450	1.5	38.0	31.0	21.0	31.0
CMPS45B185U□△	450	1.8	38.0	31.0	21.0	31.0
CMPS45B205U□△	450	2.0	48.0	29.0	19.0	29.0
CMPS45B235U□△	450	2.3	48.0	31.0	21.0	31.0
CMPS45B255U□△	450	2.5	48.0	31.0	21.0	31.0
CMPS45B305U□△	450	3.0	58.0	31.0	21.0	31.0
CMPS45B355U□△	450	3.5	58.0	35.0	22.0	32.0
CMPS45B405U□△	450	4.0	58.0	37.0	23.5	38.5
CMPS45B455U□△	450	4.5	58.0	37.0	23.5	38.5
CMPS45B505U□△	450	5.0	58.0	41.0	29.0	44.0
CMPS45B605U□△	450	6.0	58.0	41.0	29.0	44.0
CMPS45B705U□△	450	7.0	58.0	50.0	35.0	50.0
CMPS45B805U□△	450	8.0	58.0	50.0	35.0	50.0
CMPS45B106U□△	450	10.0	58.0	50.0	35.0	50.0
CMPS45B126U□△	450	12.0	58.0	58.0	41.0	56.0

※太枠内は、UL・IECのみの認定品です。